COM-MW TECHNOLOGY

FrequencyDC~40GHz, Attenuation2dB, 2W, 50Ω, 2.92-JK

Product features

Broadband, small volume.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	40	GHz
Attenuation		2		dB
VSWR			1.35	

Other parameters

Power Capacity	2W Design assurance	
Impedance	50Ω	
Connector	2.92-JK	
Connector mate rial	Stainless steel	
Operation Temp	-40~+85°C Design assurance	

Note

- 1. When installing attenuators, it is necessary to consider sufficient heat dissipation space and avoid installing them next to equipment with high heat output, otherwise the power capacity will decrease;
- 2. Small power attenuators do not have input and output directions, nor do they indicate directions. When high-power attenuators have input and output port markings, they must be connected to the equipment in the specified direction, otherwise the attenuator may burn out.


Typical test data

Frequency GHz	S11 VSWR	S12 IL (dB)
0.01	1.01	-1.74
2.86	1.01	-1.98
5.71	1.02	-2.09
8.57	1.05	-2.07
11.43	1.07	-2.03
14.29	1.01	-2.02
17.14	1.03	-2.01
20	1.08	-2.01
22.86	1.05	-2.06
25.71	1.08	-2.1
28.57	1.07	-2.16
31.43	1.09	-2.15
34.29	1.05	-2.25
37.14	1.08	-2.32
40	1.09	-2.39


Reference picture




Configuration(mm)

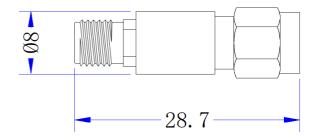

Typical test curve

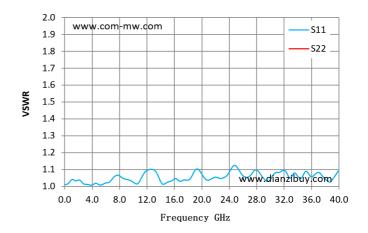

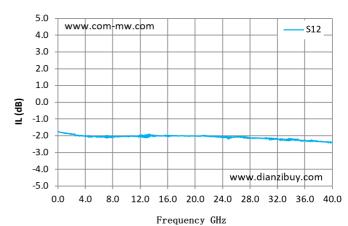

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.