

Product features

Broadband, small volume.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	13000	MHz
IL			6.5	dB
Isolation		6		dB
Input VSWR			1.3	
Output VSWR			1.3	
Amplitude balance			0.3	dB
Phase balance			4	°


Other parameters

Power Capacity	0.5W Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	Microstrip pad
Operation Temp.	-55~+85°C Design assurance
Other	Gold wire bonding

Reference picture



Configuration(mm)

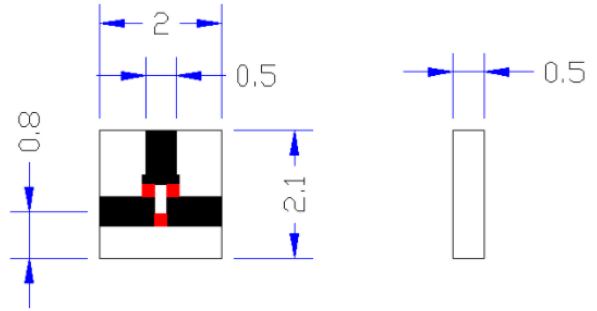

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.