

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3	~	30	MHz
IL			0.3	dB
Isolation	20			dB
Input VSWR			1.2	
Output VSWR			1.2	
Amplitude balance			0.1	dB
Phase balance			2	°

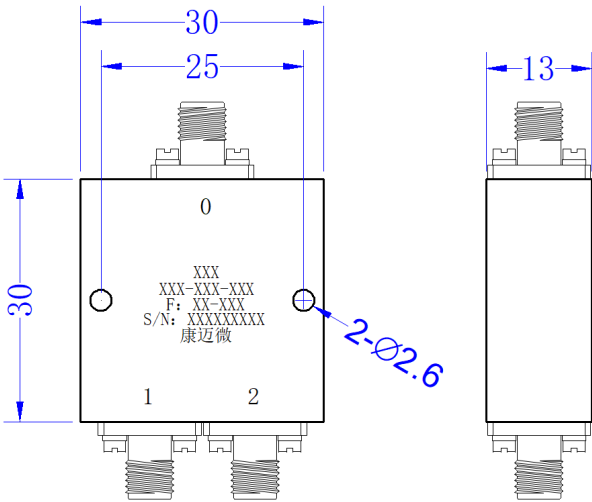
Other parameters

Power Capacity	20W Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Surface	White
Product shell material	Aluminium
Operation Temp	-40~+85°C Design assurance

Port Definition

Common port	0
Dispatch Port	1 , 2

Reference picture

Configuration(mm)

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.