

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	32	~	40	GHz
Gain		8		dBi
VSWR		1.25		
3dB Beamwidth	40°40			°
power		50		W

Other parameters

Polarization	Linear polarization
Connector	Waveguide
Waveguide model	BJ320
Outline size	21*19.1*19.1mm
Estimated weight	10g
surface treatment	silver-plate
Operation Temp.	-25~+55°C Design assurance
Storage Temp.	-45~+75°C Design assurance

Configuration(mm)

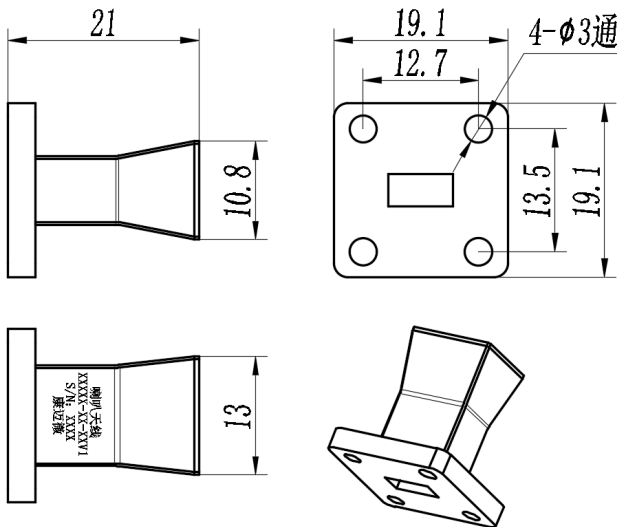

Note

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.

Reference picture

