


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	18	~	40	GHz
插入损耗(不含理论损耗)			2.5	dB
Isolation	16			dB
Input VSWR			1.8	
Output VSWR			1.8	
Amplitude balance			±0.5	dB
Phase balance			±6	°

Other parameters

Power Capacity	20W Design assurance
way	8-way
Phase	0°
Impedance	50Ω
Connector	2.92-F
Surface	Black
Operation Temp	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

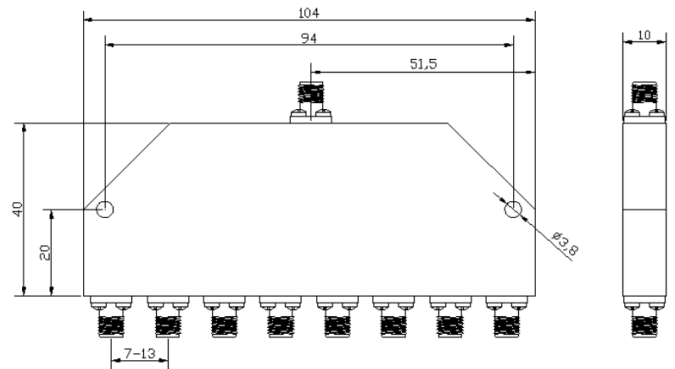

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.