



Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband frequency RX	/	/	2025	~	2120	MHz
Passband frequency TX	/	/	2200	~	2300	MHz
Passband RX IL	/	/			0.6	dB
Passband TX IL	/	/			0.6	dB
Passband VSWR	/	/			1.3	
Passband RX R ej.	2200-2300	MHz≥	60			dB
Passband TX R ej.	2025-2120	MHz≥	60			dB


Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Black
Power Capacity	10W Design assurance
Operation Temp	-0~+60°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

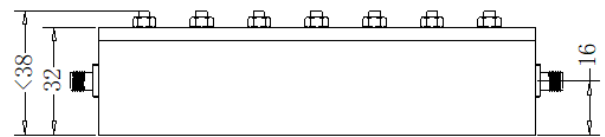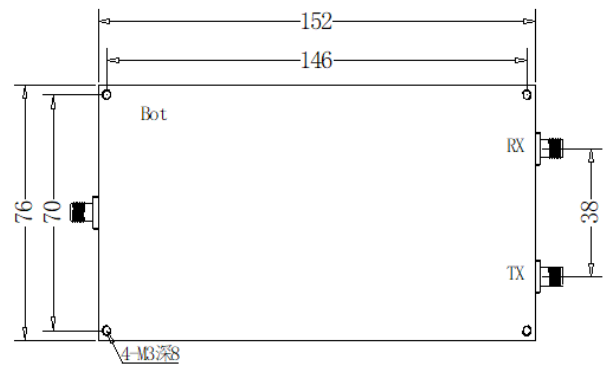

Typical test curve

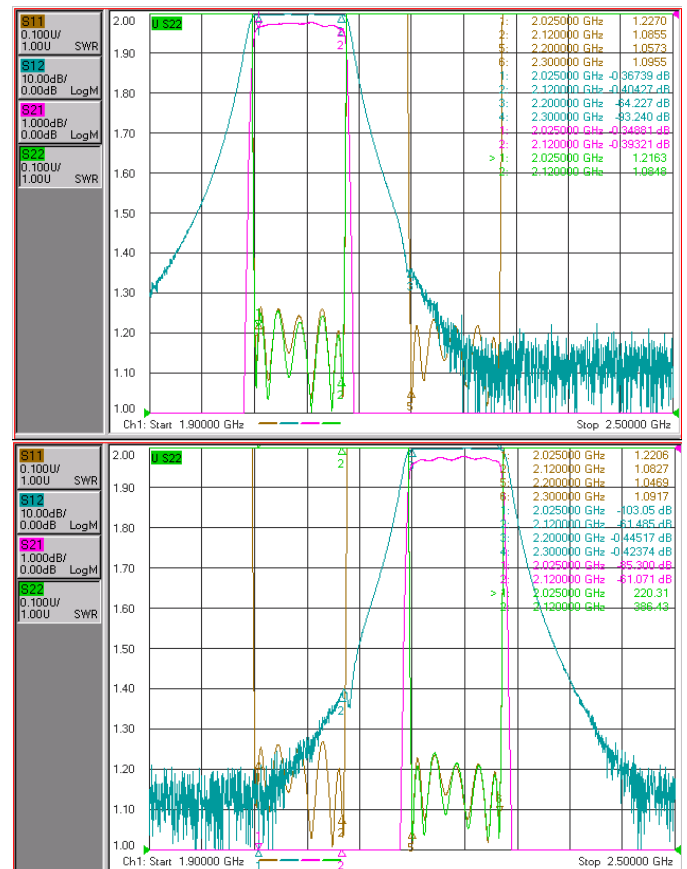

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
1	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.