

Product features

Used for indoor coverage of mobile communication.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	800	~	2700	MHz
IL			0.9	dB
Coupling	9	10	11	dB
Directivity		18		dB
Main line VSWR			1.25	
Coupled line VS WR			1.25	


Other parameters

Connector	N -K
Impedance	50Ω
Power Capacity	200W Design assurance
IM3	-140dBc@43dBm Design assurance
Operation Temp	-30~+60°C Design assurance
Quality Grade	Industrial grade

Reference picture



Configuration(mm)

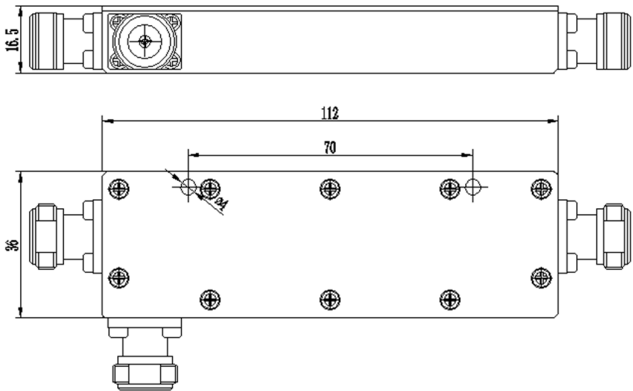

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.