

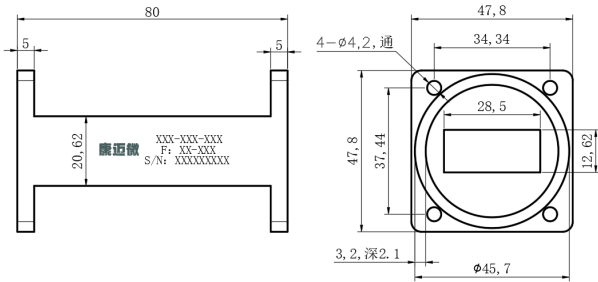
Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	6.4	~	7.3	GHz
Passband IL	/	/			0.6	dB
Rejection	DC-6	GHz≥	60			dBc
Rejection	7.7-10	GHz≥	60			dBc
Rejection	10-14	GHz≥	75			dBc
Passband VSWR	/	/			1.4	

Other parameters

Connector	Waveguide
Waveguide flange	FBM84
Surface	Black baking paint
Power	100W Design assurance
Product shell material	Aluminium
Work Temp.	-40~+70°C Design assurance

Reference picture

Configuration(mm)

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.