

Product features

For waveguide link calibration

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3.5	~	8.2	GHz


Other parameters

Ridge waveguide model	WRD350D24
Surface	Conductive oxidation
Product shell material	Aluminium
Other	Waveguide short

Reference picture



Configuration(mm)

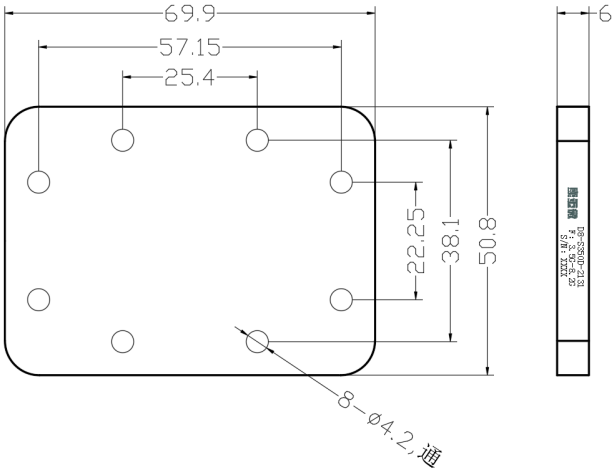

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.