

Product features

Broadband, high-power.

tech specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	3	GHz
IL			0.2	dB
Isolation	70			dB
VSWR			1.2	


Other parameters

Switch way	SPDT
Control	Manual switch
Switching characteristic	Mechanical reflective
Switch time	ns
Connector	N -K
Impedance	50Ω
Power	200W
Work Temp.	-30~+70°C Design assurance
Switching Lifetime	100000 Cycles

Port Definition

Common port	C
Branching port	1 , 2

Configuration(mm)

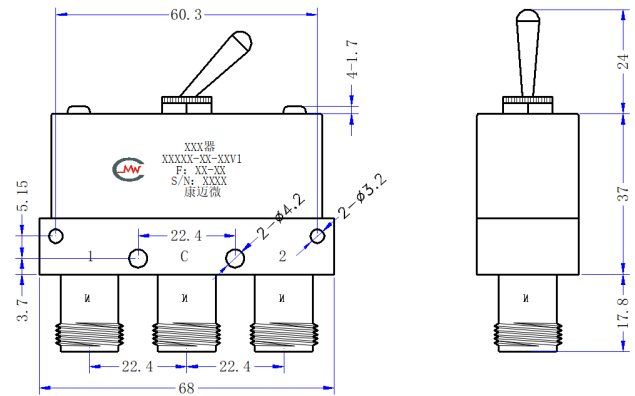

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.