


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1100	~	1620	MHz
Passband IL	/	/			1.8	dB
Ripple	/	/			1.0	dB
Rejection	DC-900	MHz≥	40			dBc
Rejection	1800-6000	MHz≥	40			dB
Passband VSWR	/	/			1.6	

Other parameters

Connector	SMD
Impedance	50Ω
Power Capacity	5W Design assurance
Operation Temp	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Functional diagram

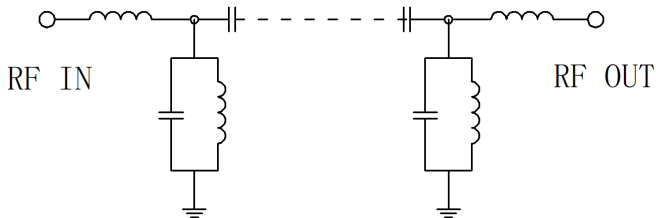

Reference picture



Configuration(mm)

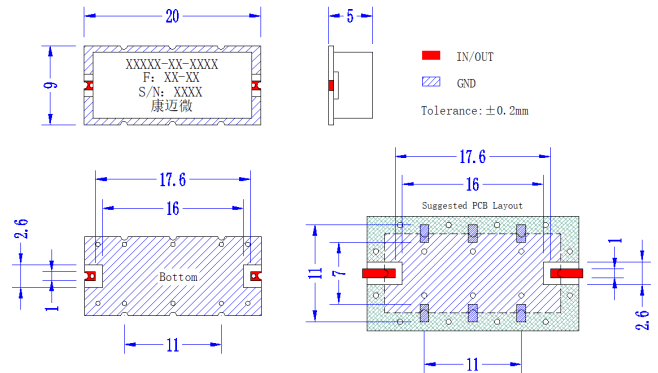

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	The product supports 190 °C reflow soldering