

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2000	~	8000	MHz
插入损耗(不含理论损耗)			2	dB
Isolation	16			dB
Input VSWR			1.7	
Output VSWR			1.7	
Amplitude balance			±0.8	dB
Phase balance			±8	°


Other parameters

Power Capacity	5W Design assurance
way	8-way
Phase	0°
Impedance	50Ω
Connector	SMA-F
Surface	silver-plate
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Reference picture



Configuration(mm)

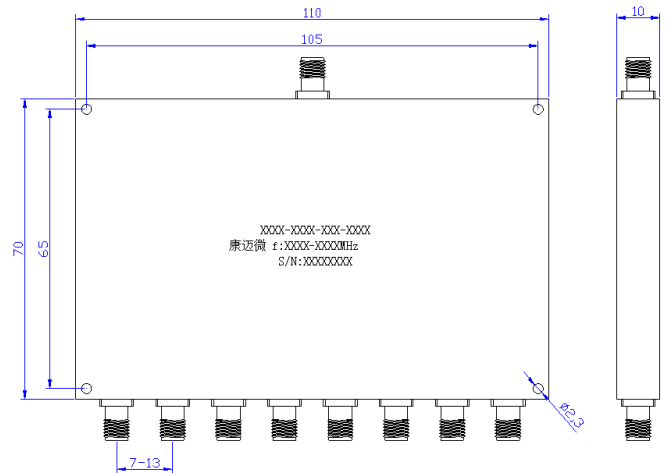

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.