

Product features

small-volume


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	14	GHz
Dynamic range	-45	~	0	dBm
Through loss			1.2	dB
Rising edge (input power ≤ 0dBm)			5	ns
Falling edge (input power ≤ 0dBm)			50	ns
Detection voltage range		0~5		V
Max input power			18	dBm

Other parameters

Connector	SMA-K
Connector material	Stainless steel
Surface	White
Working voltage	+12V
Working current	100
Work Temp.	-40~+70°C Design assurance

Configuration(mm)

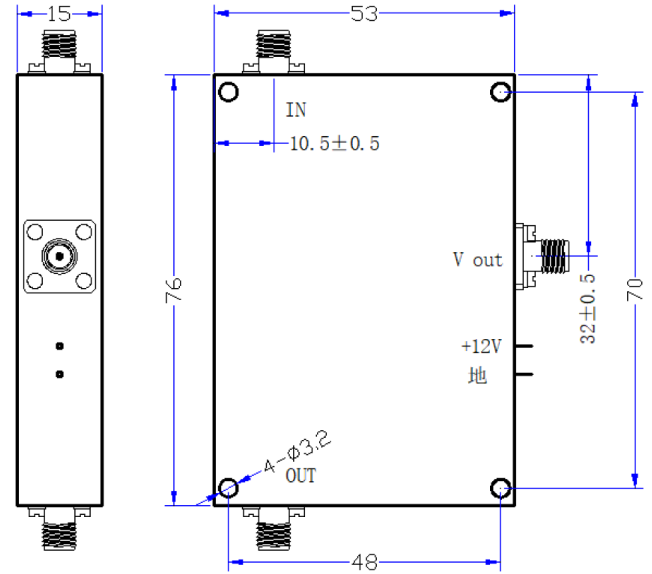

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.