


Main specifications

| Parameters | Min | Typical | Max  | Units |
|------------|-----|---------|------|-------|
| Frequency  | 2.6 | ~       | 3.95 | GHz   |
| IL         |     | 0.2     |      | dB    |
| VSWR       |     | 1.05    |      |       |
| Length     |     | 1000    |      | mm    |

Other parameters

|                 |                            |
|-----------------|----------------------------|
| Waveguide model | Rect waveguider            |
| Flange model    | FDP32                      |
| Work Temp.      | -40~+70°C Design assurance |

Configuration(mm)

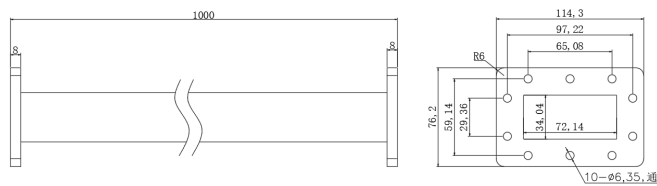

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.