


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband			2700	~	3300	MHz
Passband IL					3.0	dB
Ripple					1.0	dB
Rejection	DC-2250	MHz≥	45			dB
Rejection	3800-6000	MHz≥	45			dB
Passband VSWR					1.8	


Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+85℃
Storage Temp.	-55~+85℃ Design assurance
Quality Grade	Industrial grade

Functional diagram

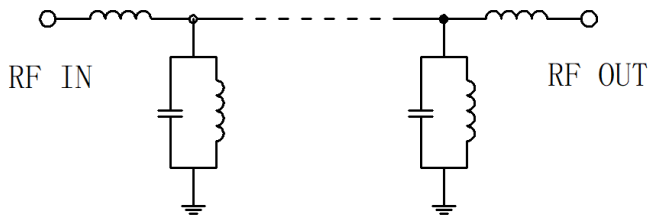

Configuration(mm)

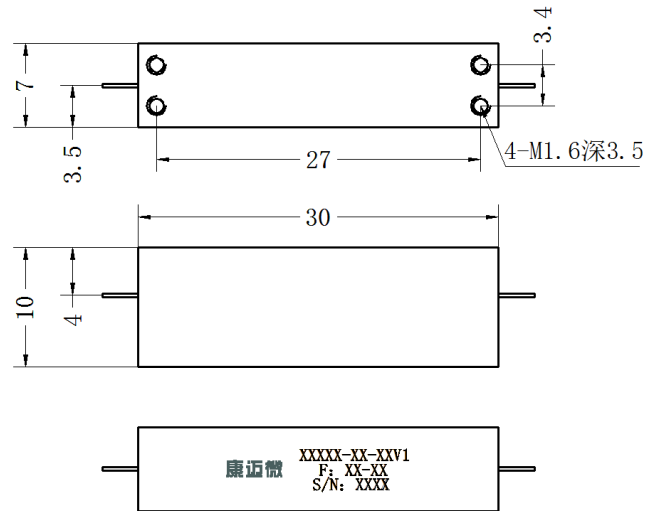

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
---	--