

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	50	GHz
VSWR			1.35	


Other parameters

Power Capacity	15W Design assurance
Impedance	50Ω
Connector	2.4-M
Connector material	Stainless steel
Surface	Black
Product shell material	Aluminium
Operation Temp	-40~+85°C Design assurance

Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.


Power Derating Curve

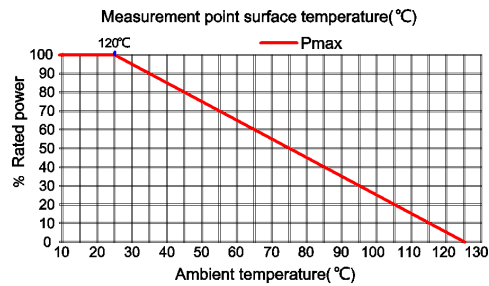

Reference picture



Configuration(mm)

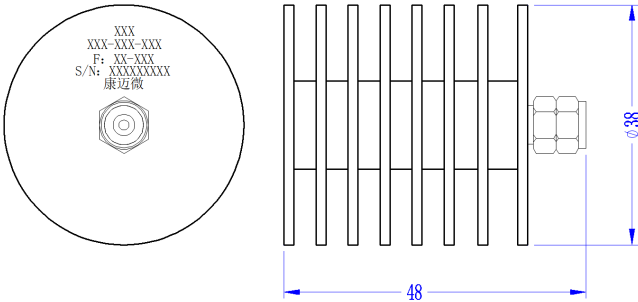

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.