


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2.6	~	3.95	GHz
IL			0.2	dB
VSWR			1.2	


Other parameters

Power	50W Design assurance
Waveguide model	Rect waveguider
Connector 1	FDP32
Connector 2	N-K
Product shell material	Aluminium
Work Temp.	-40~+70°C Design assurance

Reference picture



Configuration(mm)

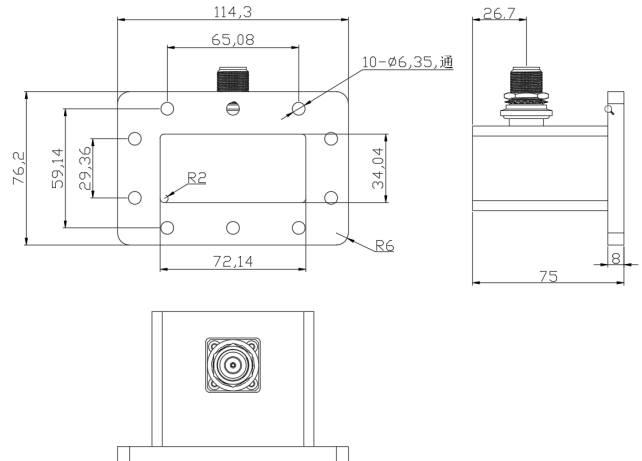

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.