


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	18	GHz
IL			0.2@3GHz ; 0.8@18GHz	dB
Isolation	80@3GHz ; 50@18GHz			dB
VSWR			1.6@18GHz ; 1.2@3GHz	

Other parameters

Connector	SMA-K
Switching characteristic	Mechanical reflective
Switch time	15mS
Working voltage	12V
Working current	400mA
Power	20W@18GHz ; 80W@3GHz
Impedance	50Ω
Switch way	SP8T
Switching Lifetime	200万次
Work Temp.	-25~+65℃ Design assurance
Quality Grade	Industrial grade
Other	USB control

Configuration(mm)

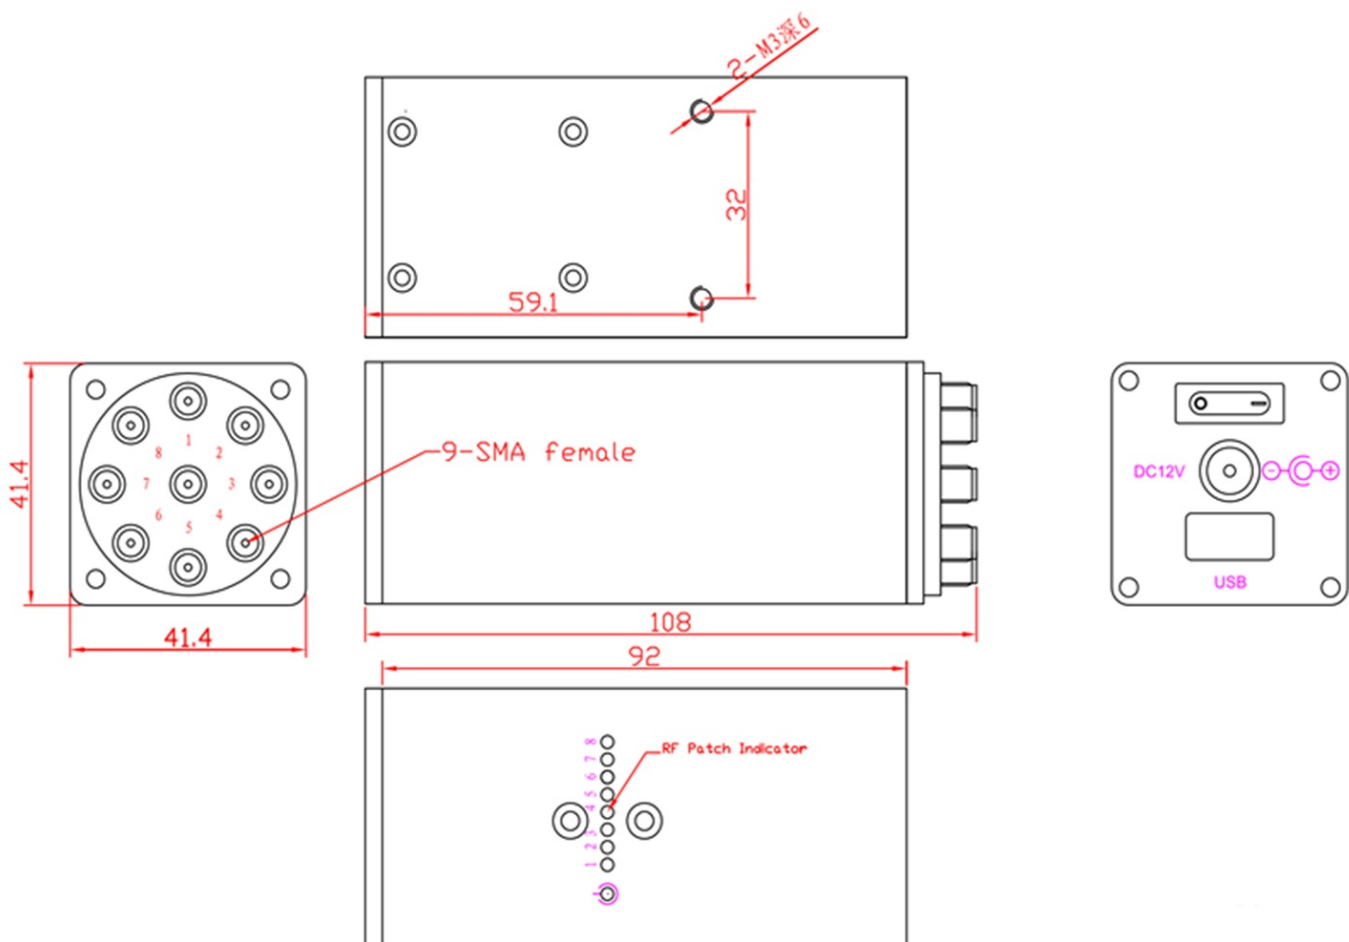

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.