

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	26.3	~	40	GHz
IL			18	dB
VSWR		1.25		


Other parameters

Power Capacity	100W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	straight waveguide
Connector 1	BJ320
Connector 2	BJ320
Operation Temp.	-40~+85°C Design assurance
Other	/

Reference picture



Configuration(mm)

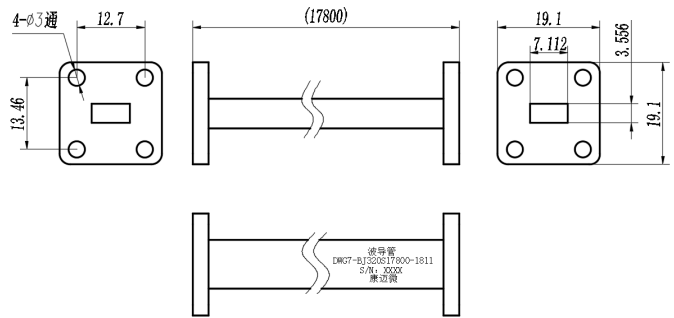

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.