

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.5	~	2	GHz
IL			0.9	dB
Coupling	9	10	11	dB
Directivity	20			dB
Main line VSWR		1.2	1.25	
Coupled line VSWR		1.2	1.3	

Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Surface	White
Power	50W
Shell Material	Aluminium
Work Temp.	-40~+85°C Design assurance


Port Definition

Input port	IN
Output port	OUT

Reference picture



Configuration(mm)

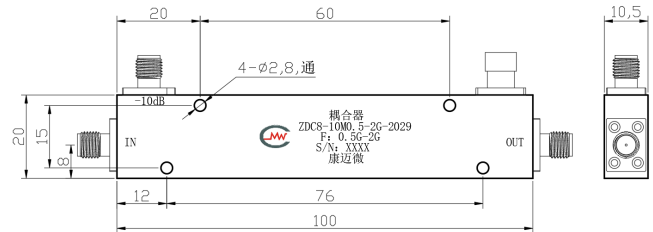

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.