

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	1200	~	1500	MHz
Passband F2	/	/	8570	~	8660	MHz
band 1 IL	/	/			1.2	dB
band 2 IL	/	/			2.5	dB
Passband VSWR	/	/			1.8	
Band 1 Rejection	DC-500	MHz≥	50			dB
Band 1 Rejection	8570-8660	MHz≥	60			dB
band 2 Rejection	DC-1500	MHz≥	60			dB


Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Product shell material	Aluminium
Operation Temperature	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Port Definition

1	Public Port	C
2	Passband 1	L
3	Passband 2	H
4	GND Port	---

Configuration(mm)

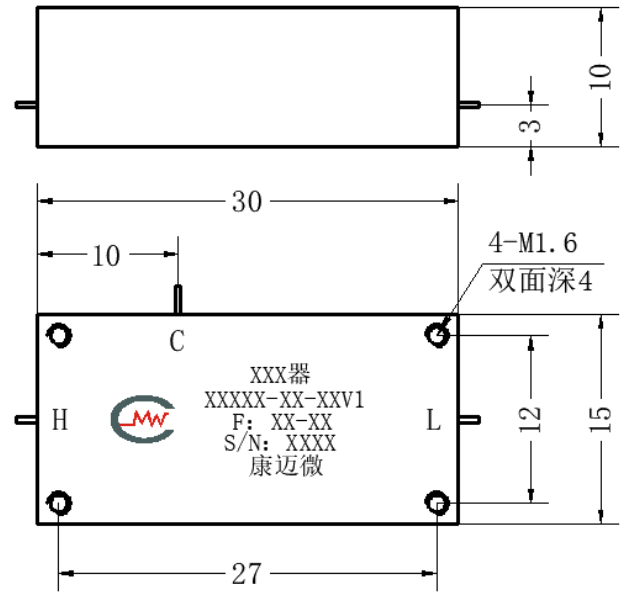

Note

1	If the temperature is higher than 125°C, consult with us before ordering.
---	---