

COM-MW TECHNOLOGY

Lifting height0.6~1.56m, With a level gauge

#### **Product features**

The height of the metal tripod can be adjusted from 0.6 meters to 1.56 meters, and the main body is made of aluminum alloy and engineering plastic. The antenna can be directly installed on the quick installation board or 1/4 "male thread


# Main specifications

Parameters	Min	Max	Units
Lifting height	0.6~	1.56	m
Folding height		0.67	m
Level adjustme nt	0	360	٥
Pitch adjustme nt	-45	90	0
Bearing		2	Kg

#### Other parameters

Connector	1/4 "male thread, multifunctional L-shaped plate	
Outline size	130*130*670mm	
Estimated wei	2.4Kg	
Surface	Black	
Operation Tem p.	-45∼+75°C Design assurance	
Other	With a level gauge	

# Configuration(mm)

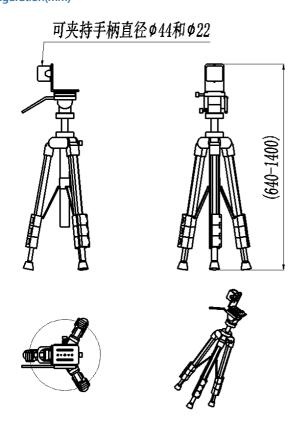


### Note

Avoid collisions during installation.

The support rod should be perpendicular to the ground to prevent antenna damage.

### Reference picture

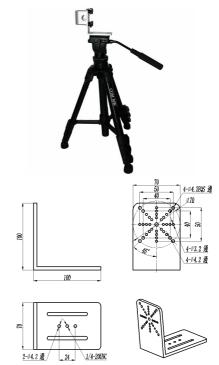

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.