


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	80	~	1000	MHz
IL		0.65		dB
Isolation	16			dB
VSWR			1.4	
Amplitude balance			±1	dB
Phase balance			±5	°

Other parameters

Power	250W Design assurance
Phase	90° Hybrid
Impedance	50Ω
Connector	SMD
Work Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade
Other	Replace QH8849

Configuration(mm)

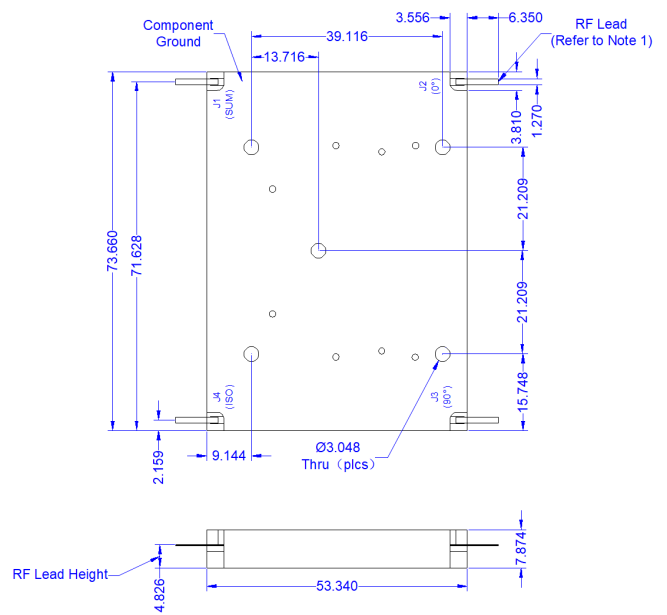

Note

1	Please do not wash the product in the cleaning solution.,Please e do not wash the product in the cleaning solution.
2	The product supports 190 °C reflow soldering

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.