

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	27.5	~	31	GHz
IL			0.4	dB
Isolation	15			dB
Input VSWR			1.25	
Output VSWR			1.25	
Amplitude balance			0.25	dB
Phase balance			6	°


Other parameters

Power	15W
way	2-way
Phase	0°
Impedance	50Ω
Connector	2.92-K
Surface	White
Work Temp.	-30~+70°C Design assurance

Port Definition

Common port	0
Dispatch Port	1,2

Configuration(mm)

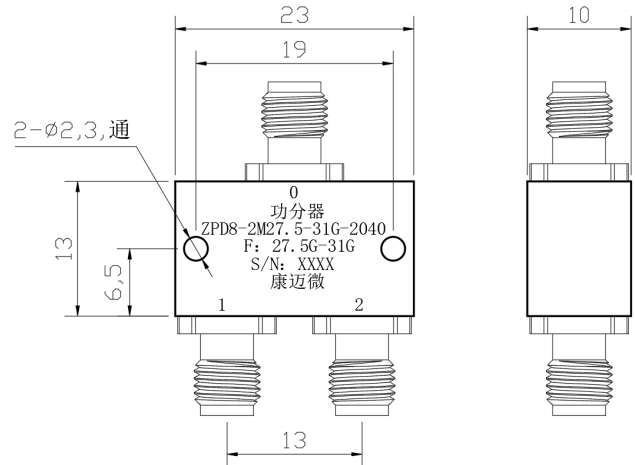

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
---	---