

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	6	GHz
IL			0.5	dB
Isolation	5			dB
Common port VSWR			1.3	
Branching port VSWR			Not have	
Amplitude balance			0.3	dB
Phase balance			4	°


Other parameters

Power Capacity	Common port, peak 3000W, average 600W, Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	N-K
Surface	Conductive oxidation
Product shell material	Aluminium
Operation Temp	-40~+70°C Design assurance

Port Definition

Common port	0
Dispatch Port	1, 2

Configuration(mm)

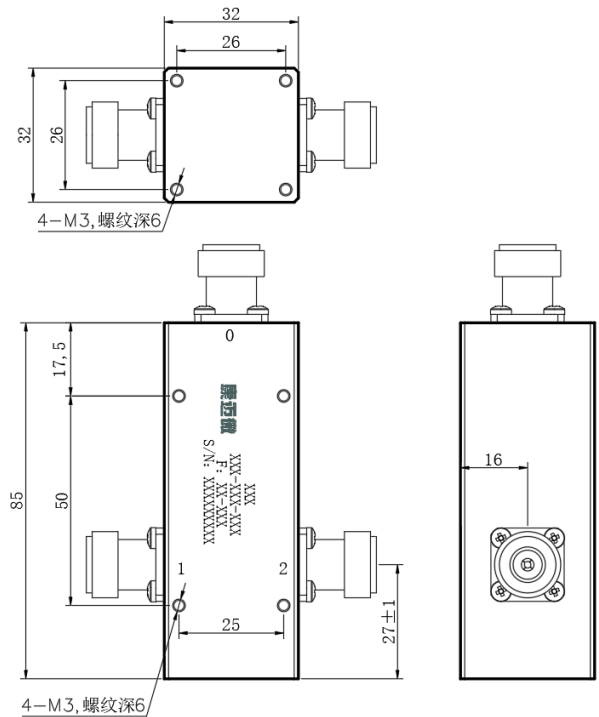

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.