


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	9300	~	9500	MHz
Passband IL	/	/			3	dB
Ripple	/	/			1	dB
Rejection	7020-9100	MHz $\geq$	50			dB
Rejection	9700-13000	MHz $\geq$	50			dB
Rejection	DC-7020	MHz $\geq$	70			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temperature	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

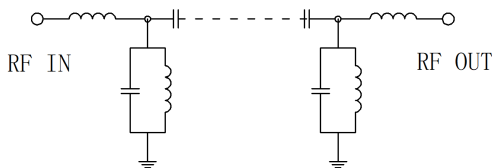

Configuration(mm)

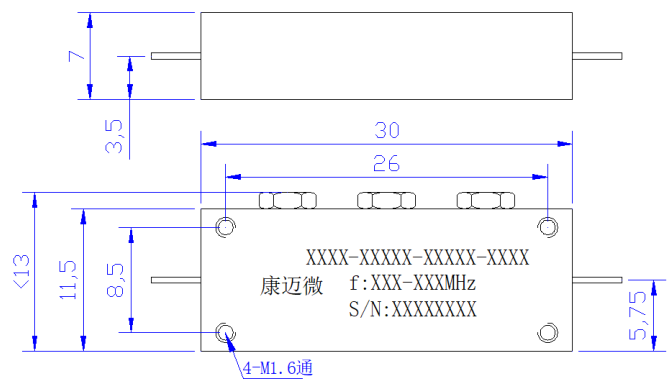

Typical test curve

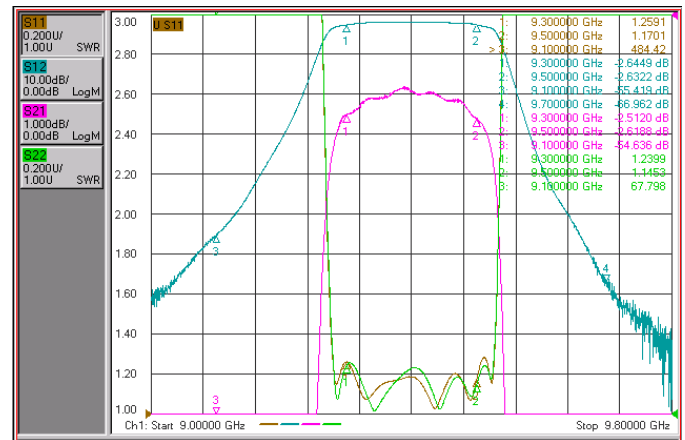

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.