

### Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	1000	MHz
IL			15	dB
Divider ratio		1:4		
Input VSWR			1.7	


### Other parameters

Power	1W Design assurance
way	2-way
Impedance	50Ω
Connector	BNC-F
Product shell material	Aluminium
Work Temp.	-10~+50°C Design assurance
Storage Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

### Port Definition

Common port	0
Divider ratio 1	1
Divider ratio 4	2

### Configuration(mm)

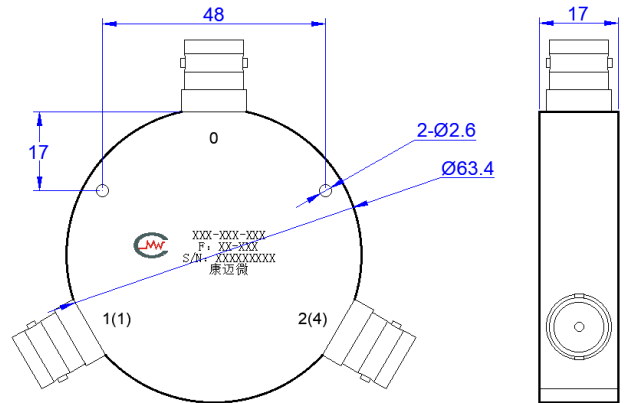

### Note

1	Please do not wash the product in the cleaning solution.,Pleas e do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.