

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	11.9	~	18	GHz
IL			0.25	dB
VSWR		1.15		


Other parameters

Power Capacity	100W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	Curved waveguide
Connector 1	BJ40
Connector 2	BJ140
Surface	Grey
Operation Temp	-25~+60°C Design assurance

Reference picture



Configuration(mm)

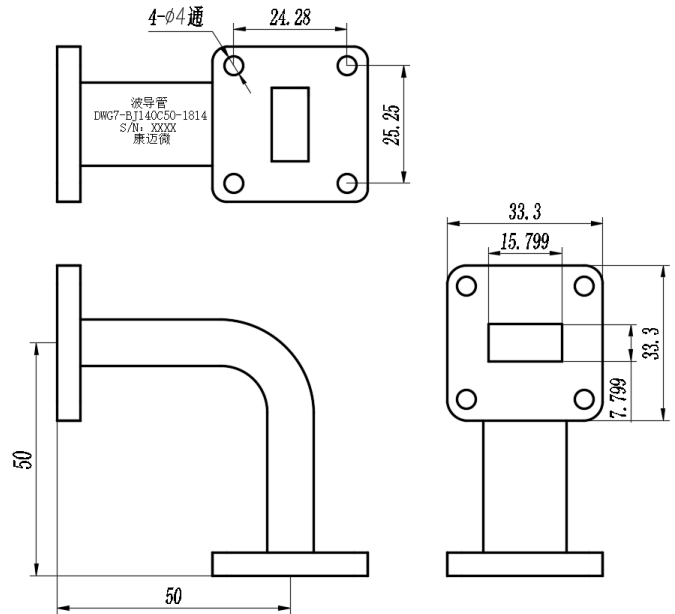

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.