

Product features

small-volume

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.3	~	2	MHz
Dynamic range	-30	~	+20	dBm
flatness		±2		dB
VSWR		2.0		


Other parameters

Connector	SMA-JK
Connector material	Shell copper
Surface	Gold-plating
Operation Temp	-45~+85°C Design assurance
Other	Positive polarity

Reference picture



Configuration(mm)

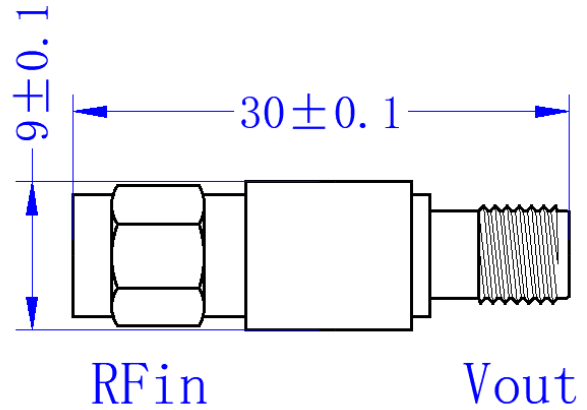

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.