

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	26	~	40	GHz
IL			0.2	dB
VSWR			1.2	


Other parameters

Power	200W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	Curved waveguide
Connector 1	BJ320
Connector 2	BJ320
Surface	Black baking paint
Product shell material	Copper
Work Temp.	-40~+70°C Design assurance

Reference picture



Note

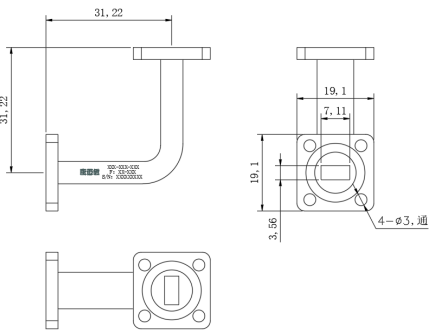

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.