

## Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband L	/	/	1920	~	1980	MHz
Passband H	/	/	2110	~	2170	MHz
Passband L IL	/	/			1.8	dB
Passband H IL	/	/			1.8	dB
Passband VSWR	/	/			1.4	
Passband ISO			80			dB


## Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Black baking paint
Power	20W Design assurance
Work Temp.	-20~+50°C Design assurance


## Port Definition

1	Public Port	---
2	Passband 1	---
3	Passband 2	---
4	GND	---

## Configuration(mm)

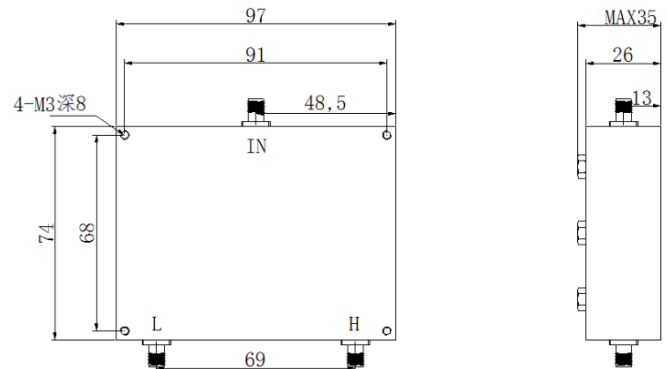

## Typical test curve

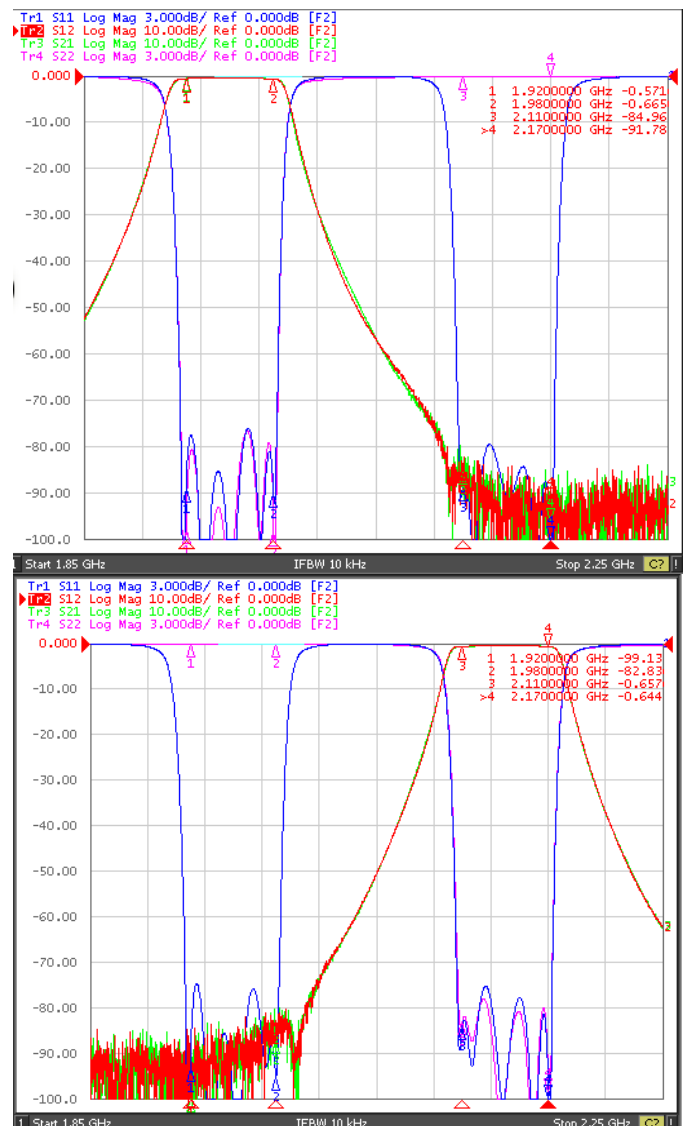

## Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
1	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.