


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	49.8	~	75.8	GHz
IL			0.8	dB
VSWR			1.15	

Other parameters

Waveguide model	Rect waveguider
Connector 1	BJ620
Connector 2	BJ620
Flange model	FUGP620
Surface	Gold-plating
Work Temp.	-55~+85°C Design assurance

Configuration(mm)

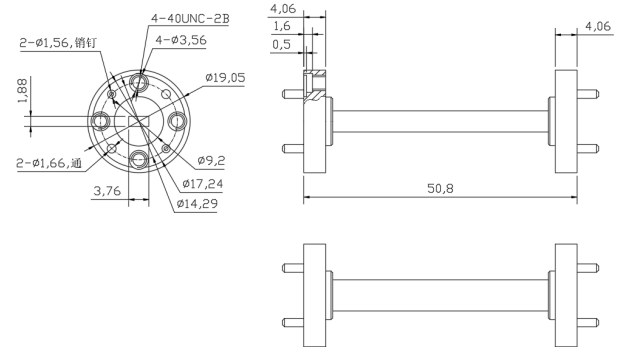

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.