


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	60.5	~	91.9	GHz
IL			0.5	dB
VSWR			1.2	

Other parameters

Waveguide model	Rect waveguider
Flange model	FUGP740
Surface	Gold-plating
Work Temp.	-55~+85°C Design assurance

Configuration(mm)

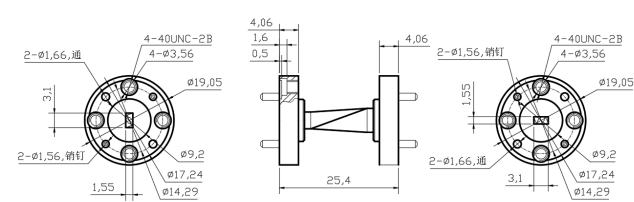

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.