

Product features

High power, Low VSWR.

Main specifications

| Parameters | Min | Typical | Max | Units |
|------------|-----|---------|------|-------|
| Frequency | 8.2 | ~ | 12.5 | GHz |
| VSWR | | | 1.2 | |


Other parameters

| | |
|----------------|----------------------------|
| Power | 200W |
| Connector | Waveguide |
| Waveguide port | BJ100 |
| Surface | Conductive oxidation |
| Work Temp. | -30~+70°C Design assurance |

Reference picture



Configuration(mm)

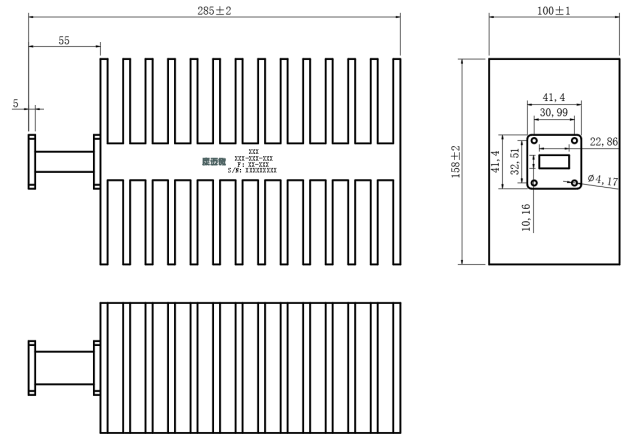

Note

Heat dissipation space is needed for installing the load, far away from the equipment with large heat output