


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	8000	MHz
IL	5		8	dB
Input VSWR			1.5	
Output VSWR			1.5	
Phase balance			10	°

Other parameters

Power Capacity	2W Design assurance
way	2-way
Impedance	50Ω
Connector	N-F
Surface	Black
Operation Temp	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

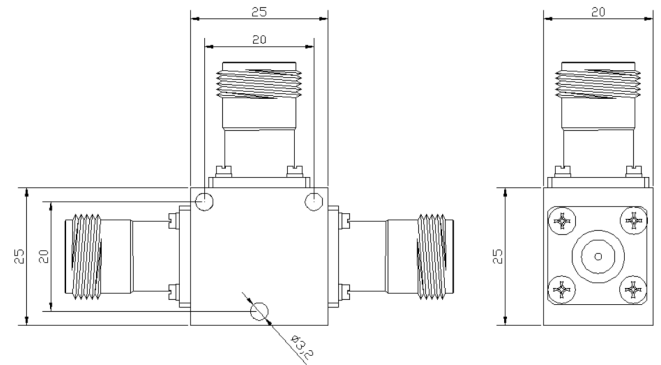

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.