


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2100	~	2500	MHz
Passband IL	/	/			0.8	dB
Ripple	/	/			0.2 (any 40MHz within the band)	dB
Rejection	DC-1000	MHz≥	60			dB
Rejection	3000-8000	MHz≥	60			dB
Rejection	1550	MHz≥	45			dB
Rejection	2700	MHz≥	33			dB
Passband VSWR	/	/			1.3	

Other parameters

Connector	Pin 0.5mm
Connector material	Gold-plating
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Delay ripple	≤3ns
Operation Temp.	-40~+70℃
Storage Temp.	-55~+85℃ Design assurance


Functional diagram

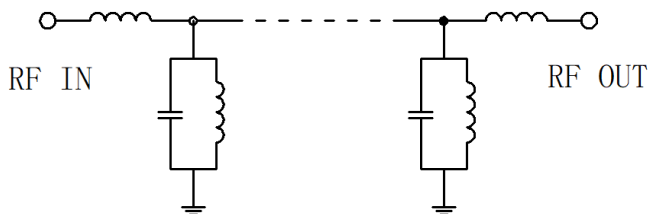

Reference picture



Configuration(mm)

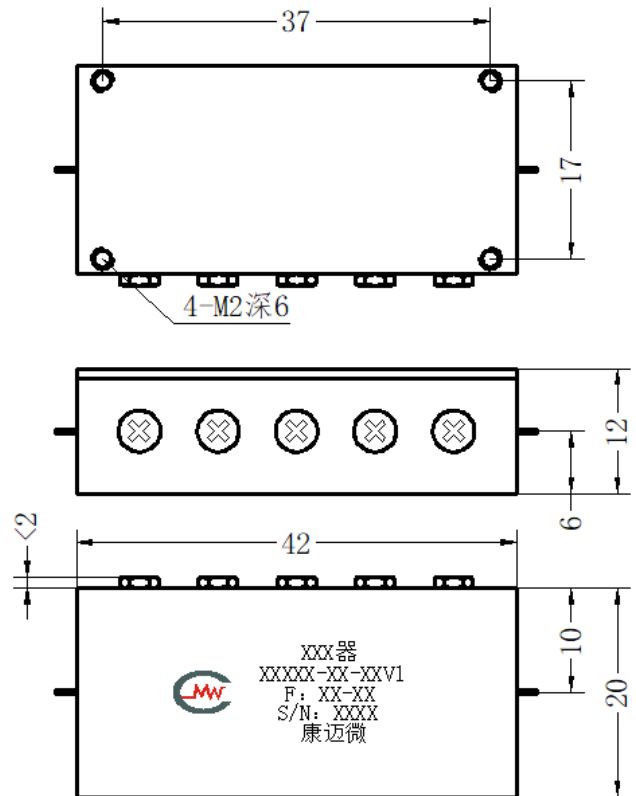

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
---	--