

Product features

Low VSWR, high cost-effectiveness.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	50	GHz
IL		0.2		dB
VSWR			1.15	


Other parameters

Connector	2.4-F & 2.4-F
Surface	Passivation of stainless steel
Product shell material	Stainless steel SUS303F
Inner conductor	Beryllium Copper Gold Plated
Spanning	PEI1000
Operation Temp	-55~+125°C Design assurance
Other	/

Reference picture



Configuration(mm)

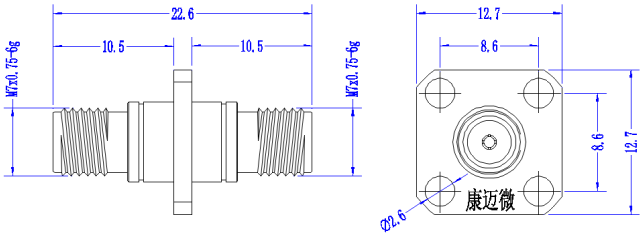

Note: The specifications and performance data contained in this data sheet are based on tests established by COM-MW.