

Product features

Broadband, low loss.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	325	~	500	GHz
IL			1	dB
VSWR			1.3	


Other parameters

Power	10W Design assurance
Waveguide model	Rect waveguider
Connector 1	WR-2
Connector 2	WR-2
Flange model	FUGP
Surface	Gold-plating
Product shell material	Copper
Work Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+125°C Design assurance

Reference picture



Configuration(mm)

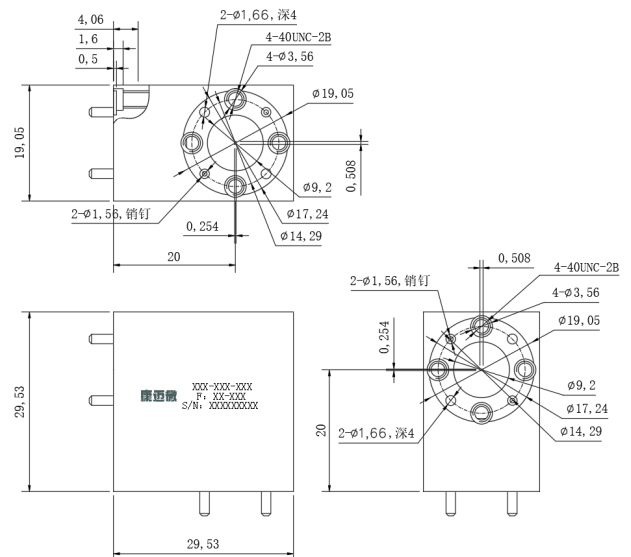

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.