

Product features

Broadband, high-power.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.5	~	2.5	GHz
IL			1	dB
Coupling	9.5	10	10.5	dB
Directivity	18	20		dB
Main line VSWR			1.2	
Coupled line VSWR			1.3	

Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Surface	White
Power	50W
Shell Material	Aluminium
Work Temp.	-40~+85°C Design assurance
Other	Including distribution loss of 0.46dB


Port Definition

Input port	1
Output port	2
Coupling port	-10dB

Reference picture



Configuration(mm)

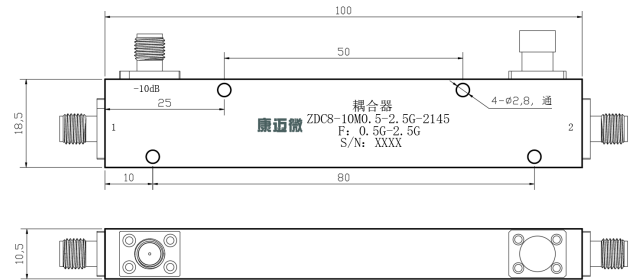

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.