

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	100	~	520	MHz
IL			0.8	dB
Isolation	15	17		dB
VSWR		1.3	1.35	
Amplitude balance			±0.8	dB
Phase balance			±5	°


Other parameters

Power Capacity	100W
Phase	90° Hybrid
Impedance	50Ω
Connector	SMD
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-55~+100°C Design assurance
Quality Grade	Industrial grade
Other	


Port Definition

IN	1	2	3	4
ISO	2	1	4	3
0°	3	4	1	2
-90°	4	3	2	1

Suggested PCB Layout

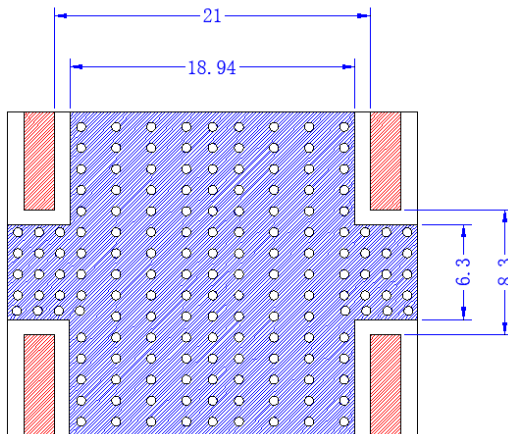

Configuration(mm)

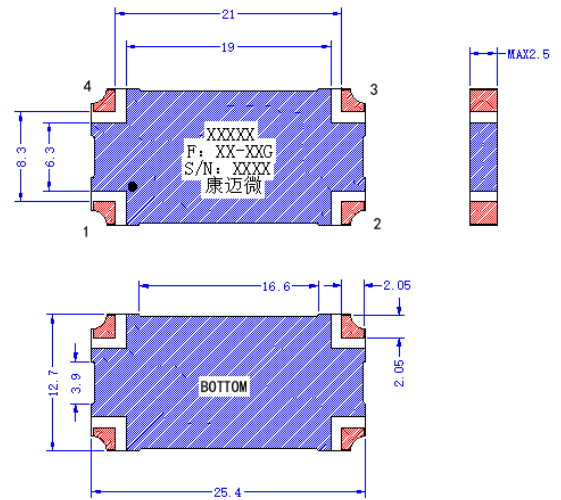

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	The product supports 220 °C reflow soldering.