


Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F1		88	~	108	MHz
Stopband F2		825	~	960	MHz
Stopband Rej.	$\geq$	30			dB
Passband		DC	~	70	MHz
Passband		128	~	750	MHz
Passband		1010	~	1350	MHz
Passband IL				3.0	dB
Passband VSWR				1.5	

Configuration(mm)

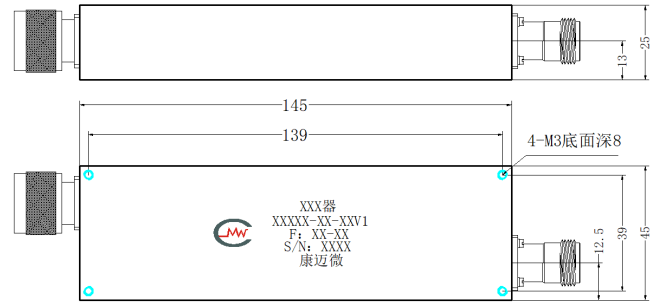

Other parameters

Connector	N -MF
Connector material	Stainless steel
Impedance	50 Ω
Surface	Breen
Power Capacity	1W Design assurance
Operation Temp.	-40~+55°C Design assurance
Storage Temp.	-55~+70°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.