


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1150	~	1350	MHz
Passband IL	/	/			2.0	dB
Ripple	/	/			0.2	dB
Rejection	2.3-2.5	GHz≥	60			dBc
Rejection	3.65	GHz≥	70			dBc
Rejection	5.95-6.15	GHz≥	60			dBc
Rejection	10.95	GHz≥	40			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Phase nonlinearity	≤10°
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Functional diagram

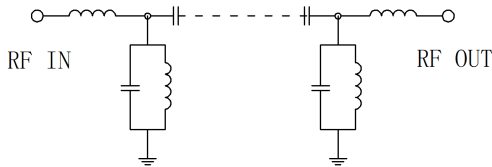

Configuration(mm)

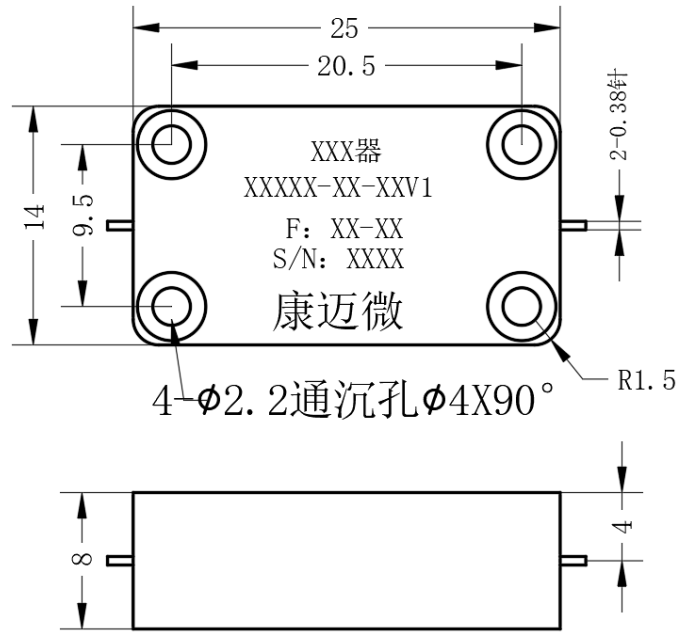

Note

1	Short term soaking and cleaning, please dry in a timely manner.
2	If the temperature is higher than 125°C, consult with us before ordering.