

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1175	~	1225	MHz
Passband IL	/	/			8.0	dB
Ripple	/	/			1.5	dB
Rejection	DC-1000	MHz≥	80			dB
Rejection	1400-2000	MHz≥	80			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

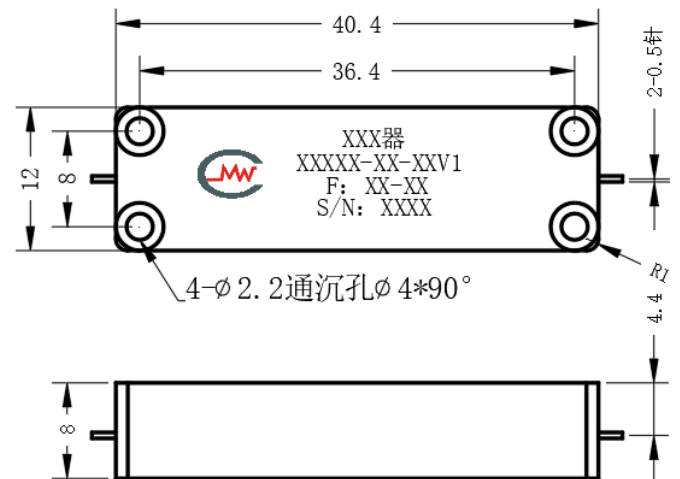

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.