


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	300	~	320	MHz
Passband F2	/	/	380	~	400	MHz
band 1 IL	/	/			1.5	dB
band 2 IL	/	/			1.5	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	600-640	MHz≥	60			dBc
Band 1 Rejection	380-400	MHz≥	65			dB
band 2 Rejection	760-800	MHz≥	60			dBc
band 2 Rejection	300-320	MHz≥	65			dBc


Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	50W Design assurance
Operation Temperature	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

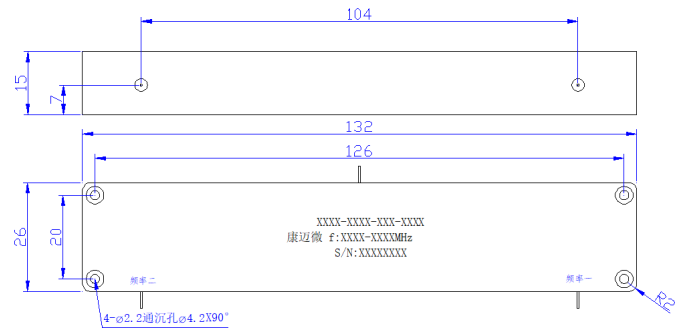

Typical test curve

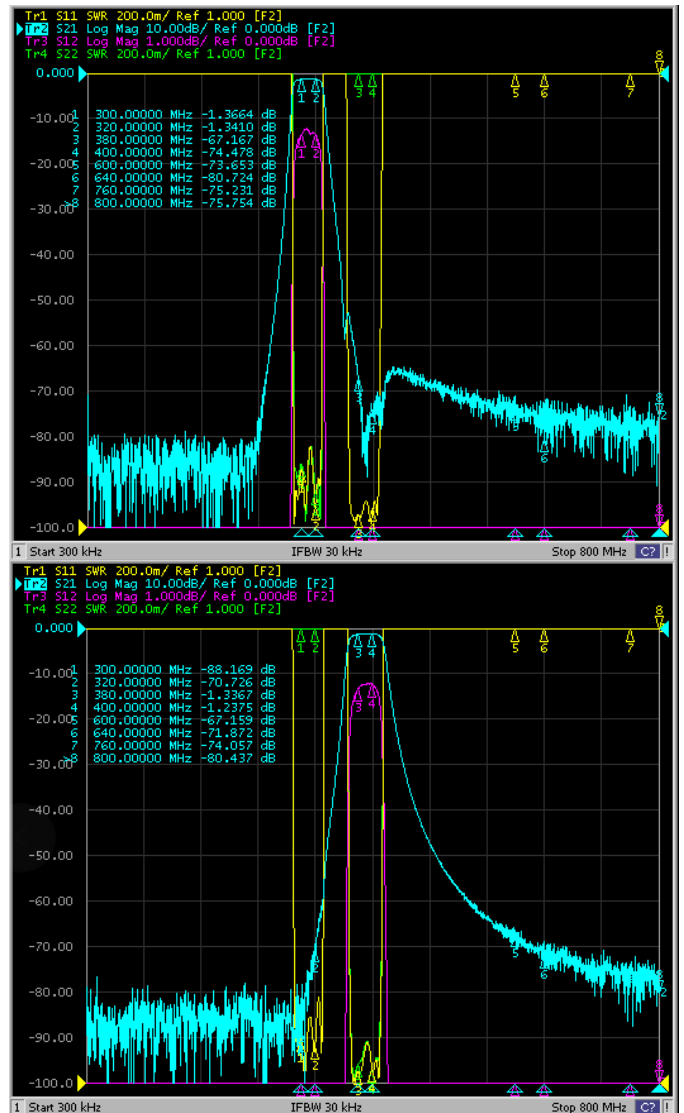

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
1	If the temperature is higher than 125°C, consult with us before ordering.