

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	60.5	~	91.9	GHz
IL			0.7	dB
VSWR			1.25	


Other parameters

Power Capacity	W (Design assurance)
Waveguide model	Rect waveguider
Waveguide shape	Curved waveguide
Connector 1	BJ740
Connector 2	BJ740
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+125°C Design assurance

Reference picture



Configuration(mm)

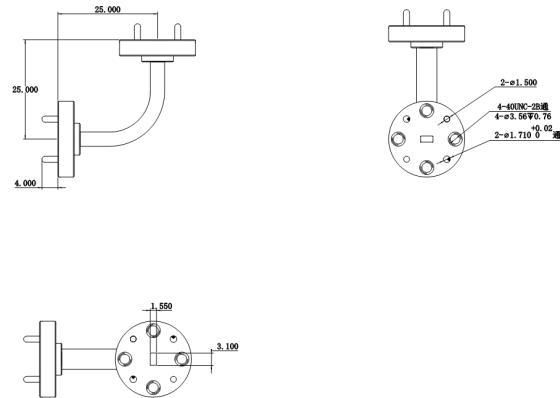

Note: The specifications and performance data contained in this data sheet are based on tests established by COM-MW.