


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Center Frequency	/	/		394		MHz
1dB BW	/	/	30			MHz
Center loss	/	/			2.5	dB
Rejection	DC-294	MHz $\geq$	70			dB
Rejection	494-1000	MHz $\geq$	70			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	SMA-JK
Impedance	50 Ω
Surface	silver-plate
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

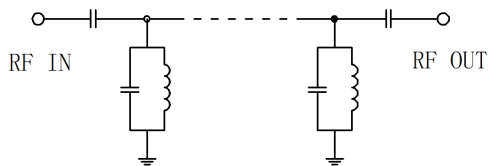

Configuration(mm)

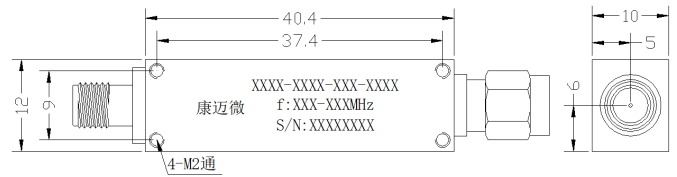

Typical test curve

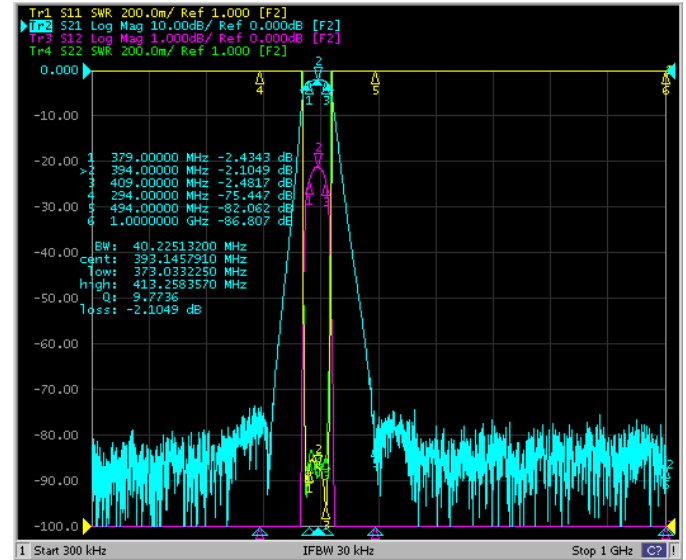

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.