

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	800	~	2500	MHz
IL			6.8	dB
Isolation	20			dB
Input VSWR			1.3	
Output VSWR			1.3	
Amplitude balance			0.5	dB
Phase balance			±4	°


Other parameters

Power Capacity	2W Design assurance
way	4-way
Phase	0°
Impedance	50Ω
Connector	SMA-F
Surface	Black baking paint
Product shell material	Aluminium
Operation Temp.	-40~+70℃
Storage Temp.	-55~+85℃ Design assurance

Reference picture



Configuration(mm)

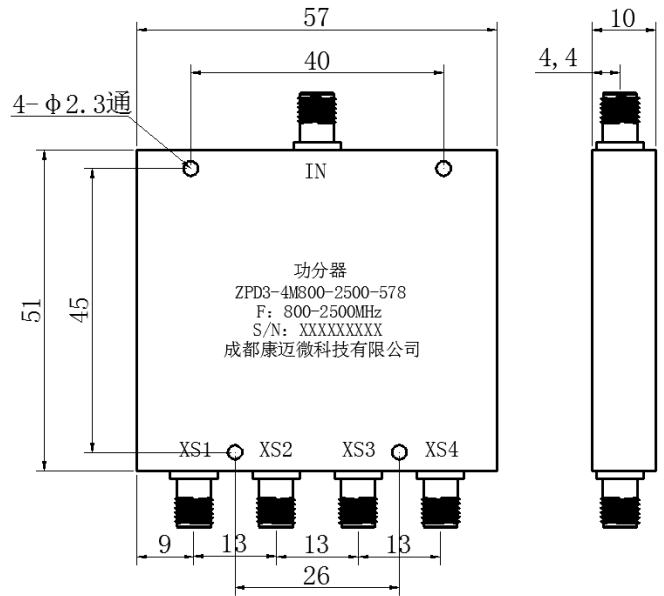

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.