

Product features

Low VSWR, high cost-effectiveness.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	67	GHz
IL		0.3		dB
VSWR			1.25	


Other parameters

Impedance	50Ω
Connector	1.85-K & 1.85-K
Surface	Passivation of stainless steel
Product shell material	Stainless steel SUS303F
Inner conductor	Beryllium Copper Gold Plated
Spanning	PEI1000
Work Temp.	-55~+125°C Design assurance
Other	Executive Standard GJB680A-2009

Reference picture



Configuration(mm)

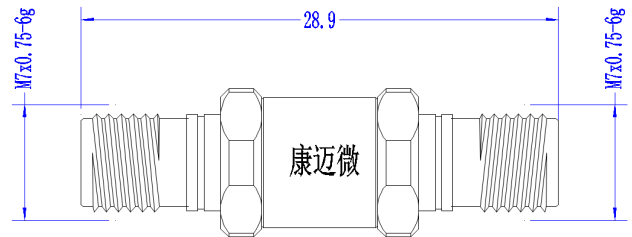

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.