

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	19.2	~	21.2	GHz
Passband F2	/	/	29	~	31	GHz
band 1 IL	/	/			0.5	dB
band 2 IL	/	/			0.5	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	29-31	GHz≥	60			dB
band 2 Rejection	19.2-21.2	GHz≥	60			dB


Other parameters

Connector	Waveguide
Waveguide port	BJ260 WR34
Surface	Silver plating
Product shell material	Aluminium
Work Temp.	-55~+75°C Design assurance

Port Definition

1	Public Port	C
2	Passband 1	1
3	Passband 2	2

Typical test curve

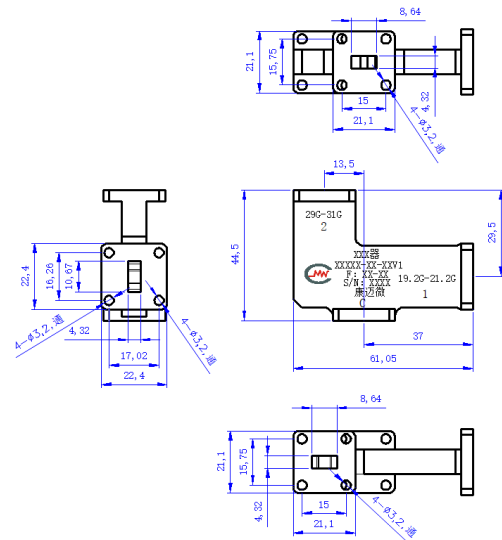

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
1	If the temperature is higher than 125°C, consult with us before ordering.