

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	40	GHz
IL			2.5	dB
Isolation	16			dB
Input VSWR			1.7	
Output VSWR			1.5	
Amplitude balance			±0.5	dB
Phase balance			±5	°

Other parameters

Power Capacity	10W Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	2.92-F
Connector material	Stainless steel
Surface	Black
Product shell material	Aluminium
Operation Temp	-40~+70°C Design assurance
Quality Grade	Industrial grade


Port Definition

Common port	IN
Dispatch Port	1 , 2

Reference picture



Configuration(mm)

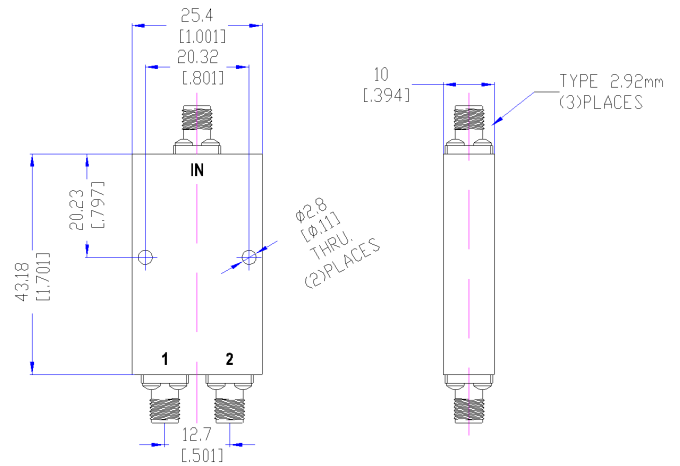

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.